



Model Number : LF-M4013B-OT series(SMD Type)

Standard operation voltage : 3V

Impedance : Less than 2.2Kohm

Sensitivity : -38~ -48 (0dB=1V/Pa, 1KHz)

Directivity : Omni-directional

Frequency : 70~14,000Hz


Operation voltage : 10V (max).

Current consumption : Max. 0.5mA

Sensitivity reduction : Within -3dB at 1~2V

S/N ratio : More than 58dB

Capacitor : -

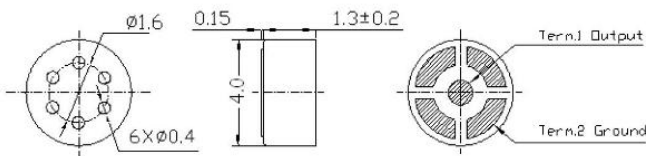

LF-M4013B-OT423-C-AB VS:2.0V RL:2.2K

