


Model Number : LF-K15B32A
 Nominal Impedance : $8 \Omega \pm 15\%$
 Resonant frequency (F0) : 800Hz $\pm 20\%$
 Effective Freq. Range : Fo ~ 20KHz
 Sound Pressure Level (dB) : $90 \pm 3\text{dB} / 10\text{cm}$
 Input Power (Nom. / Max.) : 0.5W / 0.7W
 Distortion : 5%max. at 2KHz
 Operating Temp range : $-25 \text{ }^\circ\text{C} \sim +60 \text{ }^\circ\text{C}$



LF-K15B32A 2Vrms by IEC268-5 1/2 std. baffle 10cm
 X:800.00Hz *Y:92.66dB ZA:Live Curve SSR Fund.

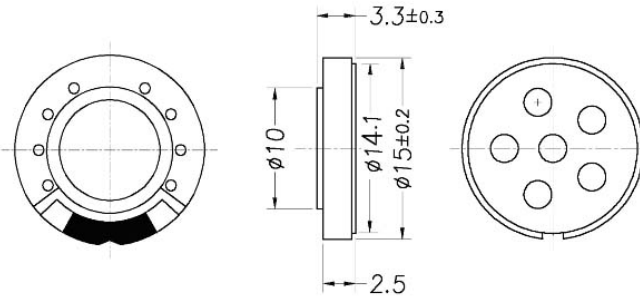