


Model Number : LF-K17B40B
 Nominal Impedance : $8 \Omega \pm 15\%$
 Resonant frequency (F0) : $700\text{Hz} \pm 20\%$
 Effective Freq. Range : $F_0 \sim 20\text{KHz}$
 Sound Pressure Level (dB) : $88 \pm 3\text{dB} / 10\text{cm}$
 Input Power (Nom. / Max.) : $0.4\text{W} / 0.6\text{W}$
 Distortion : $5\%\text{max. at } 1\text{KHz}$
 Operating Temp range : $-25 \text{ }^\circ\text{C} \sim +60 \text{ }^\circ\text{C}$



K17B40B 1.78Vrms by IEC268-5 1/2 std. baffle 10cm
 X:1.000kHz *Y:89.38dB* ZA:Live Curve SSR T.Ha.

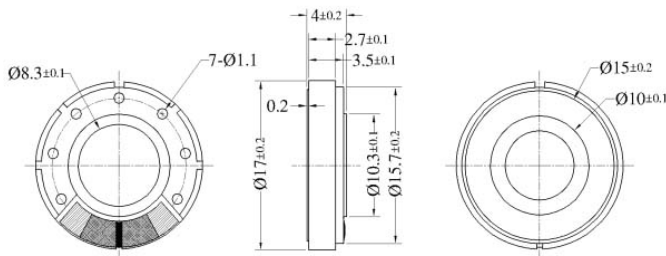