



Model Number : LF-K20B35A

Nominal Impedance : $8 \Omega \pm 15\%$

Resonant frequency (F0) : 450Hz $\pm 20\%$


Effective Freq. Range : Fo ~ 20KHz

Sound Pressure Level (dB) : $88 \pm 3\text{dB} / 10\text{cm}$


Input Power (Nom. / Max.) : 0.3W / 0.5W

Distortion : 5%max. at 1.5KHz

Operating Temp range : $-25 \text{ }^\circ\text{C} \sim +60 \text{ }^\circ\text{C}$

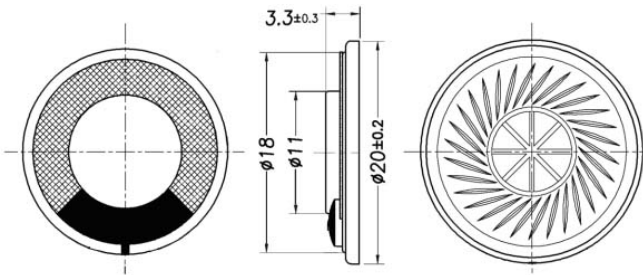

K20B35A 1.55Vrms by IEC268-5 1/2 std. baffle 10cm
X:450.00Hz *Y:88.15dB ZA:Live Curve SSR Fund.

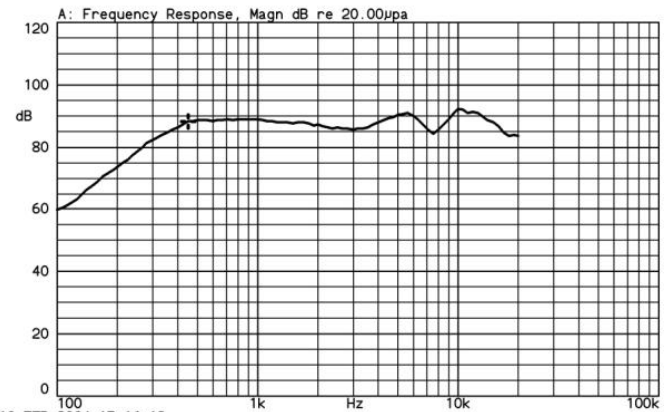

10-FEB-2004 15:16:12

Mode: SSR

