





Model Number : LF-K20B41A
 Nominal Impedance : $8 \Omega \pm 15\%$
 Resonant frequency (F0) : $1004\text{Hz} \pm 20\%$
 Effective Freq. Range : $F_0 \sim 20\text{KHz}$
 Sound Pressure Level (dB) : $94 \pm 3\text{dB} / 10\text{cm}$
 Input Power (Nom. / Max.) : $1.0\text{W} / 1.2\text{W}$
 Distortion : $5\%\text{max. at } 2\text{KHz}$
 Operating Temp range : $-20 \text{ }^\circ\text{C} \sim +60 \text{ }^\circ\text{C}$

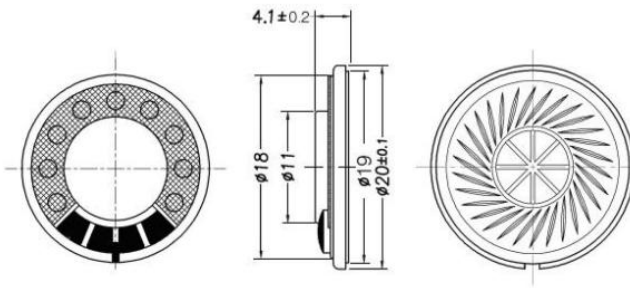

K20B41A 2 83Vrms by IEC268-5 1/2 std. baffle 10cm
 X:1.0000kHz *Y:100.16dB ZA:Live Curve SSR Fund.

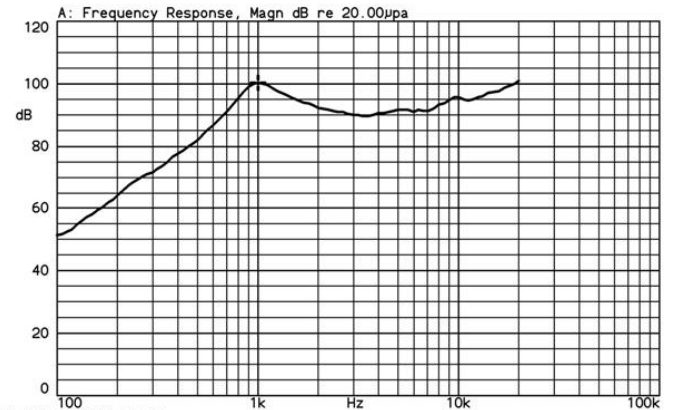

22-MAR-2005 11:50:07

Mode: SSR

