





Model Number : LF-K23B50A
 Nominal Impedance : $8 \Omega \pm 15\%$
 Resonant frequency (F0) : 600Hz $\pm 20\%$
 Effective Freq. Range : Fo ~ 20KHz
 Sound Pressure Level (dB) : $87 \pm 3\text{dB} / 10\text{cm}$
 Input Power (Nom. / Max.) : 0.3W / 0.5W
 Distortion : 10%max. at 1KHz
 Operating Temp range : -20 °C ~+60 °C



LF-K23B50A 1.55Vrms by IEC268-5 1/2 std. baffle 10cm
 X:600.00Hz *Y:95.60dB ZA:Live Curve SSR Fund.

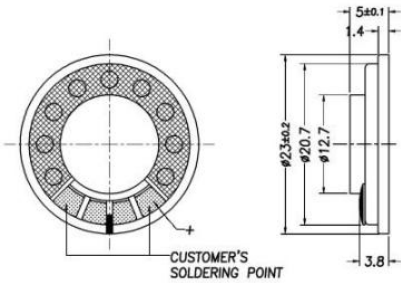