



Model Number : LF-K28B42A

Nominal Impedance : $8 \Omega \pm 15\%$

Resonant frequency (F0) : 550Hz $\pm 20\%$


Effective Freq. Range : Fo ~ 17KHz

Sound Pressure Level (dB) : 100 ± 3 dB /10cm


Input Power (Nom. / Max.) : 1.5W / 2.0W

Distortion : 10%max. at 1KHz

Operating Temp range : -25 °C ~+85 °C

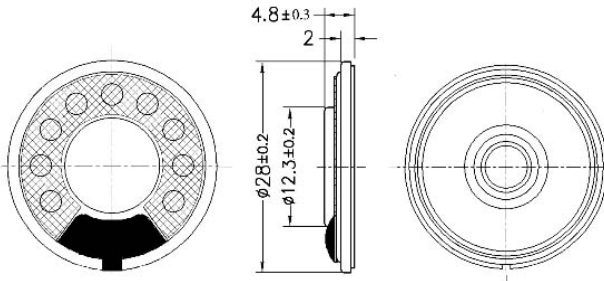

LF-K28B42A 2.83Vrms by IEC268-5 1/2 std baffle 10cm
X:530.00Hz *Y:101.10dB ZA:Live Curve SSR Fund.

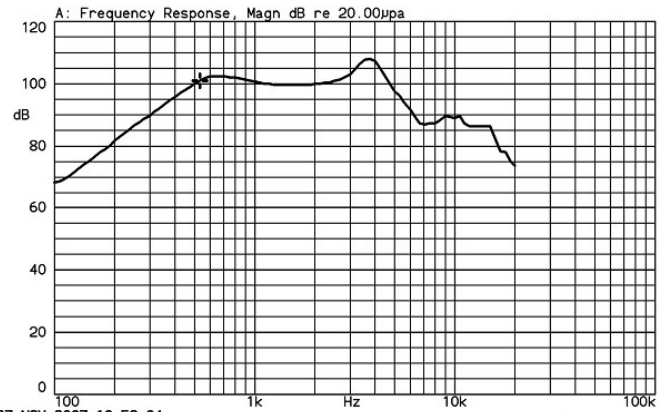

27-NOV-2007 10:59:04

Mode: SSR

