



Model Number : LF-K36B48D  
 Nominal Impedance :  $8 \Omega \pm 15\%$   
 Resonant frequency ( F0 ) :  $550 \text{ Hz} \pm 20\%$   
 Effective Freq. Range :  $F_0 \sim 5\text{KHz}$   
 Sound Pressure Level ( dB ) :  $102 \pm 3\text{dB} / 10\text{cm}$   
 Input Power ( Nom. / Max. ) :  $1.0\text{W} / 1.5\text{W}$   
 Distortion :  $10\%\text{max. at } 2\text{KHz}$   
 Operating Temp range :  $-25 \text{ }^\circ\text{C} \sim +85 \text{ }^\circ\text{C}$

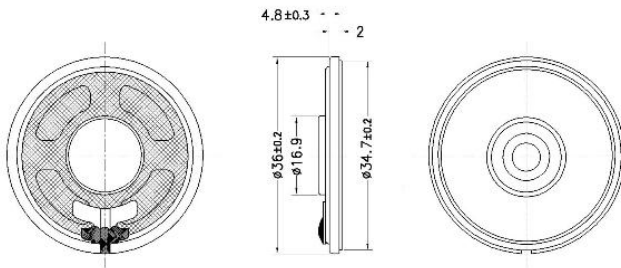

LF-K36B48D 2.83Vrms by IEC268-5 1/2 std baffle 10cm  
 X:2.000kHz \*Y:100.52dB ZA:2.0000 SSR Fund.

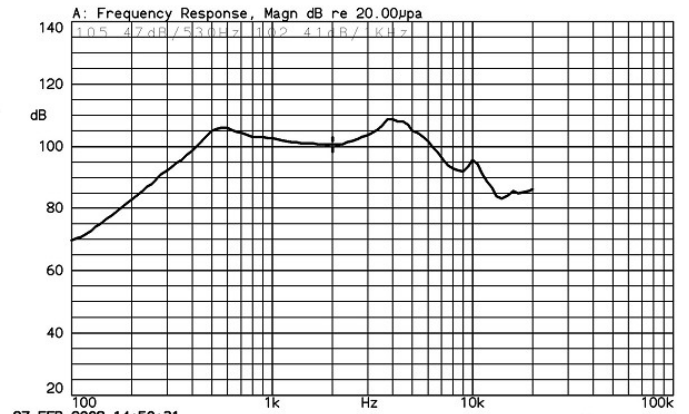

27-FEB-2008 14:50:31

Mode: SSR

