



Model Number : LF-K36B51G

Nominal Impedance : $8 \Omega \pm 15\%$

Resonant frequency (F0) : $480 \text{ Hz} \pm 20\%$


Effective Freq. Range : $F_0 \sim 20\text{KHz}$

Sound Pressure Level (dB) : $85 \pm 3\text{dB} / 50\text{cm}$


Input Power (Nom. / Max.) : $1.2\text{W} / 2.0\text{W}$

Distortion : $5\%\text{max. at } 1\text{KHz}$

Operating Temp range : $-20 \text{ }^\circ\text{C} \sim +50 \text{ }^\circ\text{C}$

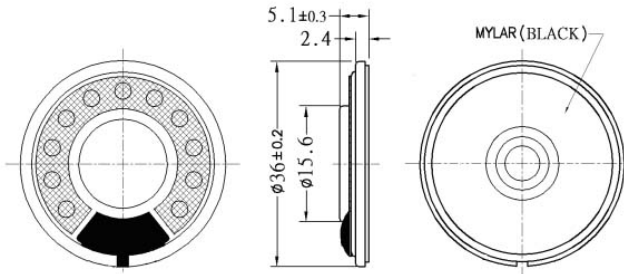

LF-K36B51G-A 2.83Vrms by IEC268-5 1/2 std baffle 50cm
X:475.00Hz *Y:83.75dB ZA:Live Curve SSR Fund.

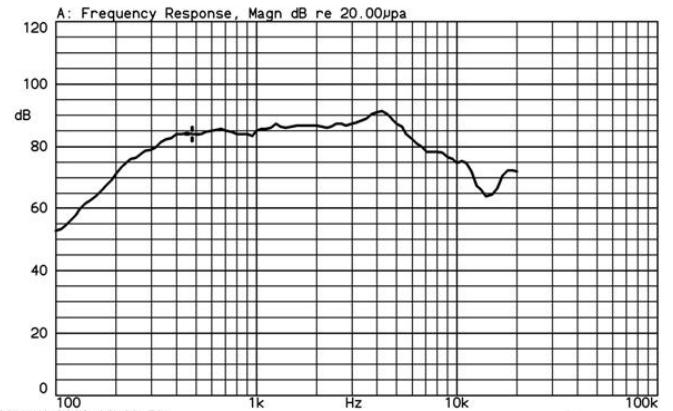

13-MAY-2008 09:23:59

Mode: SSR

