




Model Number : LF-K36F48A
 Nominal Impedance : $10\Omega \pm 15\%$
 Resonant frequency (F0) : $540\text{Hz} \pm 20\%$
 Effective Freq. Range : $F_0 \sim 20\text{KHz}$
 Sound Pressure Level (dB) : $98 \pm 3\text{dB} / 10\text{cm}$
 Input Power (Nom. / Max.) : $0.5\text{W} / 1.0\text{W}$
 Distortion : 10%max. at 1KHz
 Operating Temp range : $-20\text{ }^\circ\text{C} \sim +60\text{ }^\circ\text{C}$



LF-K36F48A 7.07Vrms by IEC268-5 1/2 std baffle 10cm
 X:1.0000kHz *Y:98.66dB ZA:Live Curve SSR Fund.

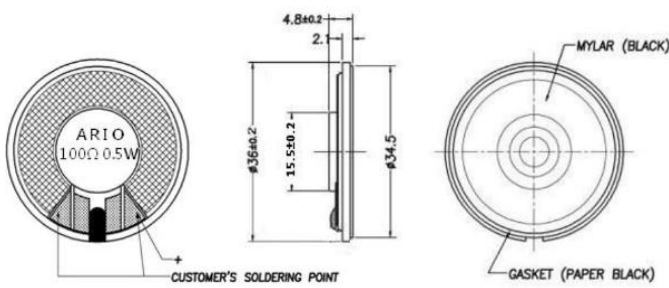