





Model Number : LF-K38B12A
 Nominal Impedance : $8 \Omega \pm 15\%$
 Resonant frequency (F0) : 900 Hz ± 100 Hz
 Effective Freq. Range : Fo ~ 5KHz
 Sound Pressure Level (dB) : 80 ± 3 dB /50cm
 Input Power (Nom. / Max.) : 0.2W /0.3W
 Distortion : 5%max. at 1KHz
 Operating Temp range : -20 °C ~+60 °C

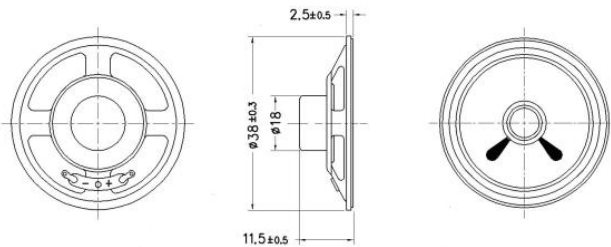

LF-K38B12A 1.26Vrms by IEC268-5 1/2 std baffle 50cm
 X:900.00Hz *Y:81.07dB ZA:Live Curve SSR Fund.

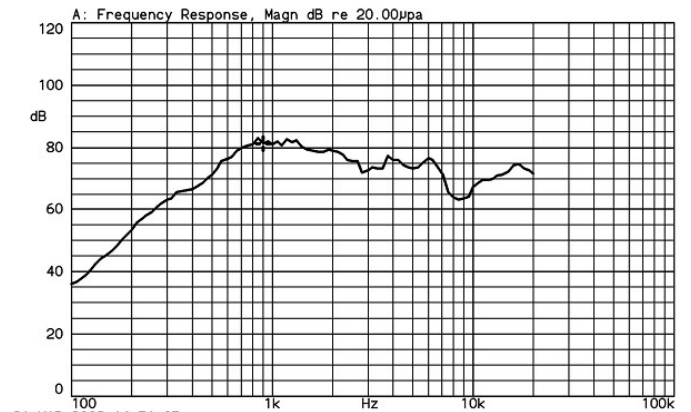

21-MAR-2008 16:51:05

Mode: SSR

