






Model Number : LF-K40B65B
 Nominal Impedance : $8 \Omega \pm 15\%$
 Resonant frequency (F0) : $310\text{Hz} \pm 20\%$
 Effective Freq. Range : $F_0 \sim 20\text{KHz}$
 Sound Pressure Level (dB) : $87 \pm 3\text{dB} / 50\text{cm}$
 Input Power (Nom. / Max.) : $1.5\text{W} / 2.0\text{W}$
 Distortion : $5\%\text{max. at } 1\text{KHz}$
 Operating Temp range : $-20 \text{ }^\circ\text{C} \sim +85 \text{ }^\circ\text{C}$

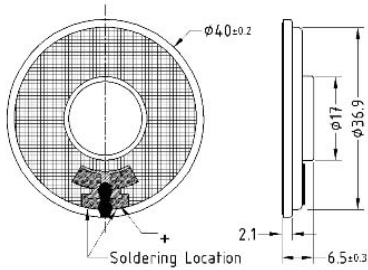

LF-K40B65B 2.83Vrms by IEC268-5 1/2 std baffle 50cm
 X:300.00Hz *Y:87.15dB ZA:Live Curve SSR Fund.

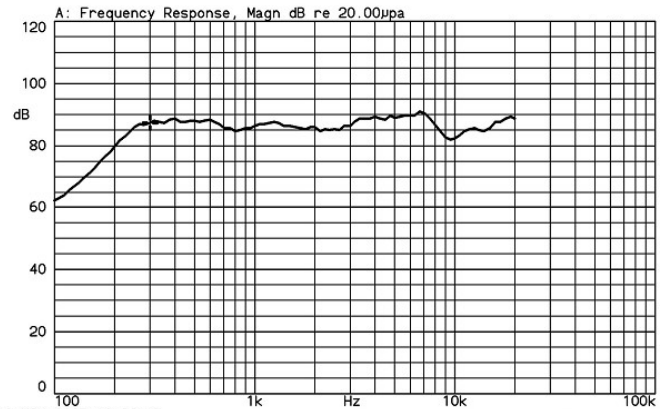

22-NOV-2007 10:38:15
 Mode: SSR

