



Model Number : LF-K5050B11A  
 Nominal Impedance :  $8 \Omega \pm 15\%$   
 Resonant frequency ( F0 ) : 515Hz  $\pm 20\%$   
 Effective Freq. Range : Fo ~ 10KHz  
 Sound Pressure Level ( dB ) :  $88 \pm 3\text{dB} / 50\text{cm}$   
 Input Power ( Nom. / Max. ) : 0.3W / 0.6W  
 Distortion : 5%max. at 1KHz  
 Operating Temp range :  $-20 \text{ }^\circ\text{C} \sim +60 \text{ }^\circ\text{C}$

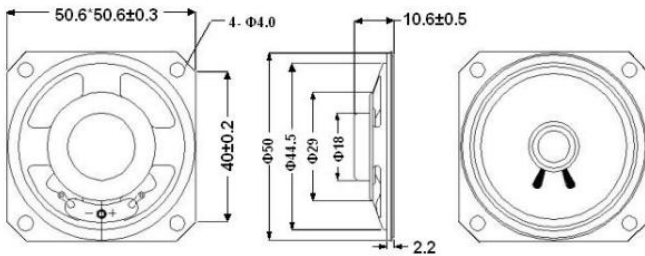

K5050B11A: 1.55Vrms by IEC268-5 1/2 std. baffle 50cm  
 X:500.00Hz \*Y:93.96dB ZA:Live Curve SSR Fund.

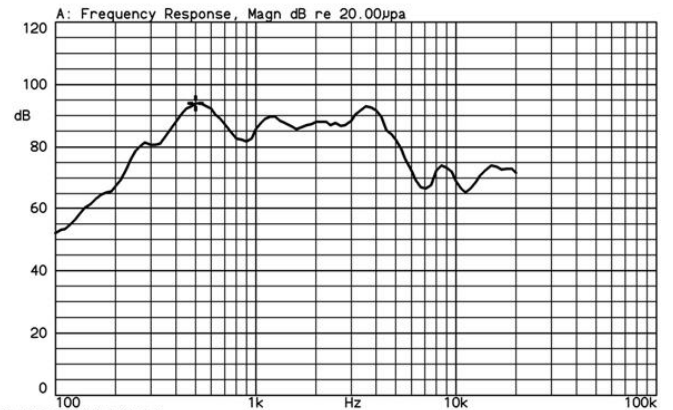

04-OCT-2004 14:45:55

Mode: SSR

