





Model Number : LF-K66A26A
 Nominal Impedance : $4 \Omega \pm 15\%$
 Resonant frequency (F0) : $240 \text{ Hz} \pm 20\%$
 Effective Freq. Range : $F_0 \sim 18\text{KHz}$
 Sound Pressure Level (dB) : $88 \pm 3\text{dB} / 50\text{cm}$
 Input Power (Nom. / Max.) : $1.5\text{W} / 3\text{W}$
 Distortion : $5\% \text{max. at } 1\text{KHz}$
 Operating Temp range : $-20 \text{ }^\circ\text{C} \sim +60 \text{ }^\circ\text{C}$

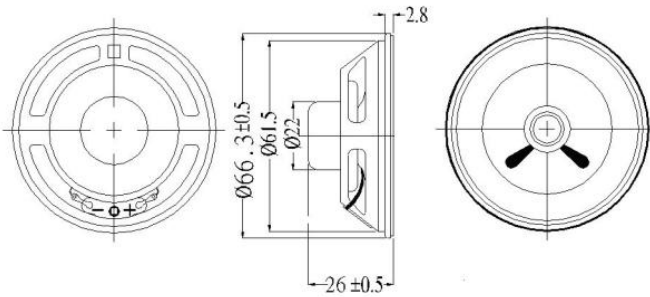

LF-K66A26A 2Vrms by IEC268-5 1/2 std baffle 50cm
 X:236.00Hz *Y:95.56dB ZA:Live Curve SSR Fund.

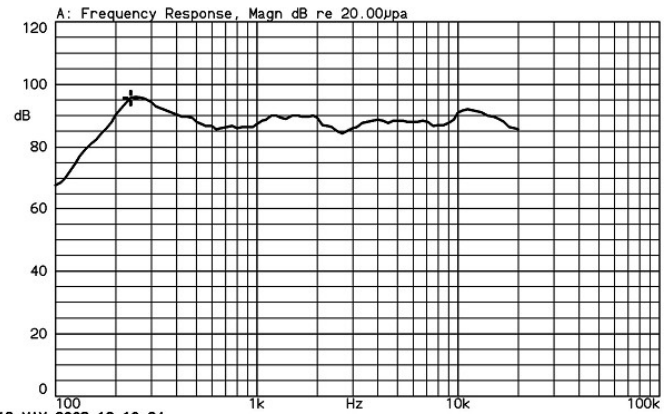

13-MAY-2008 12:10:24

Mode: SSR

