



Model Number : LF-K68B22A

Nominal Impedance :  $8 \Omega \pm 15\%$

Resonant frequency ( F0 ) : 310 Hz  $\pm 62$  Hz


Effective Freq. Range : Fo ~ 15KHz

Sound Pressure Level ( dB ) :  $89 \pm 3$ dB /50cm

Input Power ( Nom. / Max. ) : 10W /12W

Distortion : 5%max. at 1KHz

Operating Temp range : -25 °C ~+70 °C

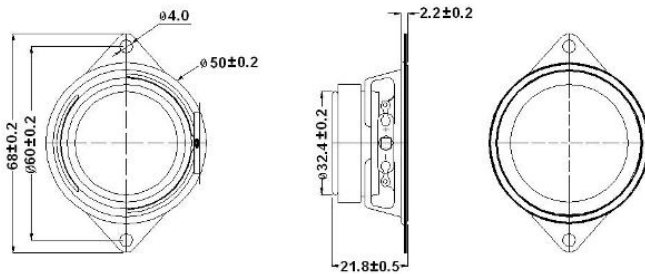

LF-K68B22A 2.83Vrms by IEC268-5 1/2 std baffle 50cm  
X:315.00Hz \*Y:89.80dB ZA:Live Curve SSR Fund.

