





Model Number : LF-K70A21A  
 Nominal Impedance :  $4 \Omega \pm 15\%$   
 Resonant frequency ( F0 ) : 450Hz  $\pm 20\%$   
 Effective Freq. Range : Fo ~ 6KHz  
 Sound Pressure Level ( dB ) :  $98 \pm 3\text{dB} / 50\text{cm}$   
 Input Power ( Nom. / Max. ) : 6.0W 10W  
 Distortion : 5%max. at 1KHz  
 Operating Temp range :  $-20 \text{ }^\circ\text{C} \sim +60 \text{ }^\circ\text{C}$

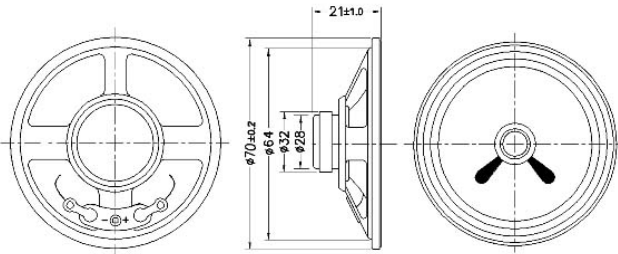

K70A21A 2Vrms by IEC268-5 1/2 std baffle 50cm  
 X:450.00Hz \*Y:98.64dB ZA:Live Curve SSR Fund.

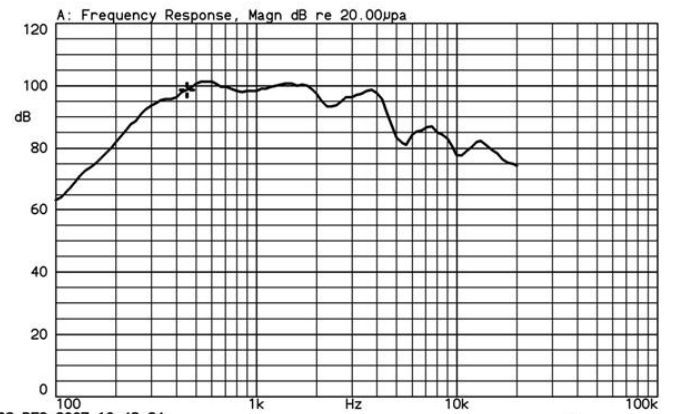

03-DEC-2007 10:43:24  
 Mode: SSR

