





Model Number : LF-K77B21A
 Nominal Impedance : $8 \Omega \pm 15\%$
 Resonant frequency (F0) : $380 \text{ Hz} \pm 20\%$
 Effective Freq. Range : $F_0 \sim 17\text{KHz}$
 Sound Pressure Level (dB) : $92 \pm 3\text{dB} / 50\text{cm}$
 Input Power (Nom. / Max.) : $5.0\text{W} / 7.0\text{W}$
 Distortion : $5\%\text{max. at } 0.5\text{KHz}$
 Operating Temp range : $-20 \text{ }^\circ\text{C} \sim +60 \text{ }^\circ\text{C}$

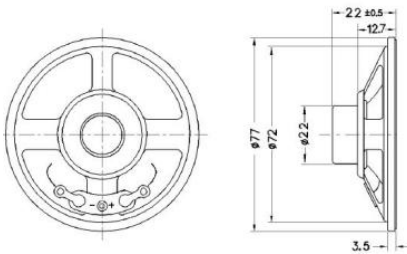

LF-K77B21A 2.83Vrms by IEC268-5 1/2 std baffle 50cm
 X:300.00Hz *Y:100.26dB ZA:1.0000 SSR Fund.

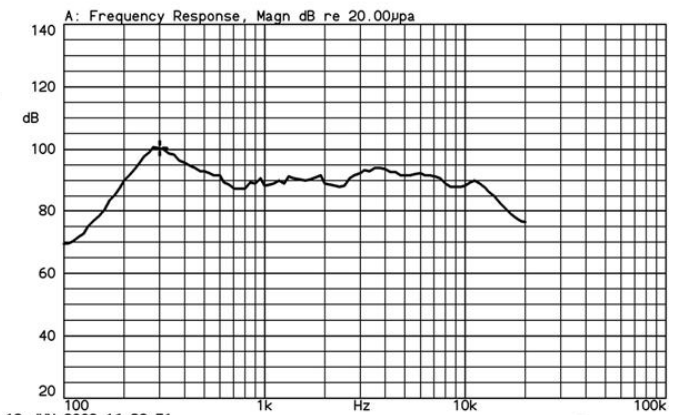

12-JUN-2009 16:39:51

Mode: SSR

