


Model Number : LF-K77B28B
 Nominal Impedance : $8 \Omega \pm 15\%$
 Resonant frequency (F0) : 300Hz $\pm 20\%$
 Effective Freq. Range : Fo ~ 16KHz
 Sound Pressure Level (dB) : $93 \pm 3\text{dB} / 50\text{cm}$
 Input Power (Nom. / Max.) : 2.0W / 3.0W
 Distortion : 5%max. at 1KHz
 Operating Temp range : $-20 \text{ }^\circ\text{C} \sim +55 \text{ }^\circ\text{C}$



K77B28B 2.83Vrms by IEC268-5 1/2 std. baffle 50cm
 X:315.00Hz *Y:101.41dB ZA:Live Curve SSR Fund.

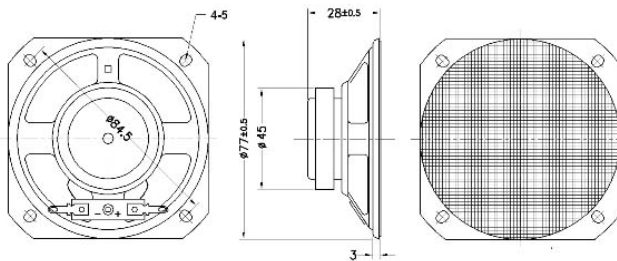